

Aera

Aera[®] Transformer[®]

Digital Mass Flow Products

Transform your process with greater flexibility and lower cost of ownership



Aera

Benefits

Superior results

- ▶ Outstanding accuracy, repeatability, and stability
- ▶ Superior reliability
- ▶ Comprehensive communication and control
- ▶ Easy integration
- ▶ Substantial cost savings
- ▶ World-class service and support

Features

- ▶ Multi-gas, multi-range selection
- ▶ Fast response
- ▶ All-metal seals
- ▶ Field programmable*
- ▶ DeviceNet®, RS-485, or analog control
- ▶ Multiple alarm and diagnostic capabilities
- ▶ RoHS compliant

*Available in multi-gas, multi-range Transformer MFCs



Worldwide, the Aera® name is synonymous with high-quality, high-performing designs that are backed by exceptionally responsive customer service.

Aera®'s has an outstanding reputation for digital MFC reliability and performance, with shipments of over 100,000 digital MFC units.

Suitable for a variety of applications, including CVD, PVD, diffusion, and etch, Aera® Transformer® digital mass flow controllers (MFCs) and mass flow meters (MFMs) will transform your process, providing superior flexibility and efficiency for improved yield, higher productivity, and lower cost of ownership. Advanced sensor and valve technology, field-proven platform components, and high-speed, digital circuitry deliver very precise gas flow control. With superior reliability and outstanding response, accuracy, and repeatability, this versatile product line offers both single-gas and multi-gas, multi-range MFCs to suit your priorities for value and functionality.

Superior Performance Results

Transformer® MFCs enable film deposition and etch characteristics that are not only extremely uniform, but also highly repeatable. Superior response, accuracy, and repeatability enhance tool productivity and production yields.

Superior Reliability

Designed with field-proven Aera® platform components and high-speed digital circuitry, Transformer® MFCs have achieved superior reliability performance, with < 0.5% zero drift over one year. They provide the consistent results you expect from Aera® products, increasing process efficiency, maximizing performance, and improving yields.

Outstanding Accuracy, Repeatability, and Stability

Aera® Transformer® MFCs enhance tool productivity and production yields by combining digital technology with algorithms unique to Aera® products. These features, in addition to advanced sensor technology, provide extremely fast response times. The result is exceptional performance:

- High accuracy (see Specifications)
- High repeatability (0.2% of full scale)
- Fast response (< 1 s)
- Long-term stability (< 0.5% zero drift over one year)

Just eight multi-gas, multi-range Transformer® MFCs can replace hundreds of spares and part numbers.

Comprehensive Communication and Control

Transformer[®] MFCs and MFMs accommodate 0 to 5 VDC analog, RS-485, or DeviceNet[®] digital control.


Digital communication features include:

- Flow, valve, and CPU alarms
- Gas-flow totalizing and ramping control
- External inputs and outputs for peripherals
- System override capabilities
- In-situ gas and range customization

Easy Integration

Obtain the performance and reliability advantages of Aera[®] Transformer[®] products by replacing other brands—with no installation hassles. Certain models feature standard electrical connectors and critical dimensions to easily fit existing systems. These compact designs fit both IGS and conventional gas panels.

Digital (Transformer[®]) vs. Analog Accuracy

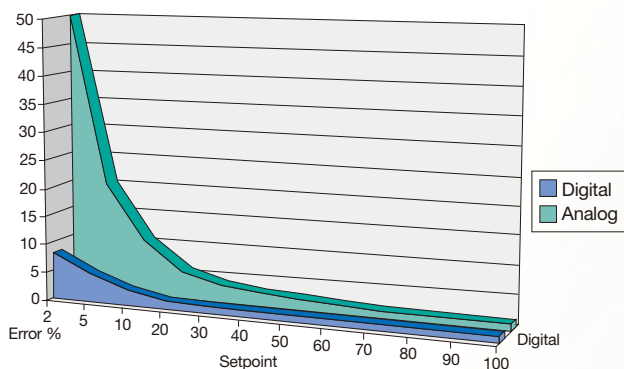

Digital Transformer[®] MFCs provide superior accuracy compared to analog models

Maximum Ease and Versatility

Adaptable to any process environment, multi-gas, multi-range Transformer[®] MFCs are easily field programmable to run process gases for selected ranges within the MFC's mechanical limits. For quick gas type and range reassignment, these top-performing MFCs allow for multiple gas selection options without recalibration, enabling them to run various gases for any flow range—10 sccm to 30 slm.

Substantial Cost Savings

Multi-gas, multi-range technology, combined with the outstanding Aera[®] MFC performance you've come to rely on, reduces overall costs by cutting inventory requirements. Just eight Transformer[®] MFCs can replace hundreds of spares and part numbers. Single-gas MFCs require backup inventory for each process gas. Multi-gas, multi-range Transformer[®] MFCs dramatically reduce such requirements because Transformer[®] MFCs can replace any other MFC used in the process. Only eight units are required for flows up to 30 slm.

World-Class Service and Support

The Aera[®] product family's record of reliability reflects a superior standard of design and manufacturing quality. Our support and repair capabilities demonstrate those same, high-quality standards. No matter what your need or location, our international network of support sites, exceptional application experience and expertise, ensure superior service and fast turnaround.

Transform your process with versatile MFCs and MFMs.

Specifications

| Operational | 780X/785X Series | 781X/786X Series | 782X Series |
|--|--|---|---------------------------------|
| Full-Scale Ranges (N ₂ Equivalent) | Single-gas models—10 sccm to 5 slm | Single-gas models—5 to 50 slm | Single-gas models—50 to 200 slm |
| | Multi-gas model (1)—10 to 30 sccm | Multi-gas model (7)—5001 to 10,000 sccm | — |
| | Multi-gas model (2)—31 to 100 sccm | Multi-gas model (8)—10,001 to 30,000 sccm | — |
| | Multi-gas model (3)—101 to 300 sccm | — | — |
| | Multi-gas model (4)—301 to 1000 sccm | — | — |
| | Multi-gas model (5)—1001 to 3000 sccm | — | — |
| | Multi-gas model (6)—3001 to 5000 sccm | — | — |
| Accuracy | $\leq \pm 1\%$ of set point (25 to 100% of full scale) $\leq \pm 0.25\%$ of full scale (2 to 25% of full scale) | | $\leq \pm 2.0\%$ of full scale |
| Settling Time | ≤ 1.0 s typical per SEMI E17-91 (above 10% of full scale) | | ≤ 4.0 s |
| Linearity | $\leq \pm 0.5\%$ of full scale | | $\leq \pm 1.0\%$ of full scale |
| Repeatability | $\leq \pm 0.2\%$ of full scale | | |
| Leak Integrity | 1×10^{-11} Pa m ³ /s (He) max | | |
| Control Range | 2 to 100% of full scale | | |
| Differential Pressure | 7 to 40 psiD (49 to 275 kPaD) | | 21 to 40 psiD (147 to 275 kPaD) |
| Max Operating Pressure | 70 psiG (490 kPaG) | | |
| Proof Pressure | 140 psiG (981 kPaG) | | |
| Temperature | 15 to 50°C | | |
| Alarm/Diagnostics | Flow, valve voltage, auto-zero adjustment, communications, and microprocessor errors | | |

| Physical | 780X/785X Series | 781X/786X Series | 782X Series |
|----------------------|--|------------------|--|
| Control Valve Type | Normally-closed or normally-open solenoid | | |
| Seals | Metal | | |
| Materials | 316LSS, 316SS, PTFE, KM45 | | |
| Standard Fittings | 1/4" VCR [®] compatible; 1.5"/1.125" IGS bottom/surface mount (c-seal or Wseal [®]) | | 3/8" VCR [®] compatible; IGS bottom/surface mount (c-seal or Wseal [®]) |
| Surface Finish | Electropolished and ultra-cleaned to ≤ 5 Ra | | |
| Attitude Sensitivity | May be mounted in any position | | |
| Weight | 1.0 kg (1/4" VCR [®] compatible) | | 2.8 kg (3/8" VCR [®] compatible) |

| Electrical | 780X/785X Series | 781X/786X Series | 782X Series |
|--------------------------------|---|------------------|-------------|
| Connection Type | 9-pin D or DeviceNet [®] | | |
| Input Power | +15 VDC $\pm 2\%$ at ≤ 140 mA, -15 VDC $\pm 2\%$ at ≤ 240 mA | | |
| | DeviceNet [®] : +11 VDC at 550 mA, +24 VDC at 225 mA | | |
| Power Consumption | 4.5 W (max) | | 4.8 W (max) |
| Input Signal | Analog mode: 0 to 5 VDC (input impedance > 1 M Ω) | | |
| | Digital mode: 0 to 100% | | |
| | DeviceNet [®] : ODVA (125 K, 250 K, 500 Kbps) | | |
| Output Indication | Analog mode: 0 to 5 VDC (output resistance ≥ 2 k Ω) | | |
| | Digital mode: 0 to 100% | | |
| | DeviceNet [®] : ODVA (125 K, 250 K, 500 Kbps) | | |
| Digital/Service Communications | EIA standard, RS-485, two-wire, half-duplex, multi-drop with one RJ-11 connector (DeviceNet [®] models) or two RJ-11 connectors (9-pin D models) | | |

Note: For full model and suffix code information, see Model and Suffix Codes on next page. Specifications are subject to change without notice.

Model and Suffix Codes

Mass Flow Controllers

| Category | Description | Suffix Codes | | | | | | | | | |
|---|---|-----------------|-----|-----|------|-----|-----|-----|------------------------------------|-----|-----|
| Product Type | Mass flow controller | FC- | ... | ... | ... | ... | ... | ... | ... | ... | |
| Connector Type | DeviceNet® | ... | DN | ... | ... | ... | ... | ... | ... | ... | |
| | 9-pin D | ... | PA | ... | ... | ... | ... | ... | ... | ... | |
| RoHS Compliance | Compliant with RoHS directives | ... | ... | R | ... | ... | ... | ... | ... | ... | |
| Full-Scale Flow Range ^{※1} | 10 sccm to 5 slm | ... | ... | ... | 780 | ... | ... | ... | ... | ... | |
| | | ... | ... | ... | 7800 | ... | ... | ... | ... | ... | |
| | | ... | ... | ... | 785 | ... | ... | ... | ... | ... | |
| | | ... | ... | ... | 7850 | ... | ... | ... | ... | ... | |
| | 5 to 50 slm | ... | ... | ... | 781 | ... | ... | ... | ... | ... | |
| | | ... | ... | ... | 7810 | ... | ... | ... | ... | ... | |
| | | ... | ... | ... | 786 | ... | ... | ... | ... | ... | |
| | | ... | ... | ... | 7860 | ... | ... | ... | ... | ... | |
| | 50 to 200 slm | ... | ... | ... | 782 | ... | ... | ... | ... | ... | |
| | | ... | ... | ... | 7820 | ... | ... | ... | ... | ... | |
| | Control Valve | Normally-closed | ... | ... | ... | ... | C | ... | ... | ... | ... |
| | | Normally-open | ... | ... | ... | ... | ... | ... | ... | ... | ... |
| Connector ^{※2} | Top mounted connector | ... | ... | ... | ... | ... | T | ... | ... | ... | |
| | Side mounted pigtail connector | ... | ... | ... | ... | ... | Y | ... | ... | ... | |
| Fittings | 1/4" VCR® compatible | ... | ... | ... | ... | ... | ... | 4V | ... | ... | |
| | 3/8" VCR® compatible (782x Series only) | ... | ... | ... | ... | ... | ... | 6V | ... | ... | |
| | 1.125" c-seal | ... | ... | ... | ... | ... | ... | BA | ... | ... | |
| | 1.125" Wseal® | ... | ... | ... | ... | ... | ... | BW | ... | ... | |
| | 1.5" c-seal | ... | ... | ... | ... | ... | ... | BM | ... | ... | |
| | 1.5" Wseal® | ... | ... | ... | ... | ... | ... | BF | ... | ... | |
| Gas | Type of gas | ... | ... | ... | ... | ... | ... | ... | N ₂ | ... | |
| Flow | Flow range of gas (sccm or slm) | ... | ... | ... | ... | ... | ... | ... | ... | ... | |
| Single-Gas Example | | FC- | PA | R | 7800 | C | | 4V | N ₂ | 200 | |
| (MFC with 9-pin D connector, RoHS compliant, normally-closed valve, 1/4" VCR® compatible fittings, N ₂ gas, 200 sccm full-scale range) | | | | | | | | | | | |
| Multi-Gas/Multi-Range | Configuration for MGMR functioning (see Full-Scale Ranges above for details for multi-gas models 1 through 8) | ... | ... | ... | ... | ... | ... | ... | Multi -1 to -8 (10 sccm to 30 slm) | | |
| | | | | | | | | | N ₂ equivalent | | |
| Multi-Gas Example | | FC- | PA | R | 7800 | C | | 4V | MULTI - 3 | | |
| (MFC with 9-pin D connector, RoHS compliant, normally-closed valve, 1/4" VCR® compatible fittings, 101 to 300 sccm full-scale range) | | | | | | | | | | | |

※1 Three-digit flow range suffix codes are for DN Series models; Three-digit and four-digit flow range suffix codes are for available for PA Series models. Consult factory for details.

※2 Electronic options "T" and "Y" are available only for compact 785 and 786 Series.

Model and Suffix Codes

Mass Flow Meters

| Category | Description | Suffix Codes | | | | | | | |
|---|---|--------------|-----|-----|------|-----|-----|----------------|-----|
| Product Type | Mass flow meter | FM- | ... | ... | ... | ... | ... | ... | ... |
| Connector Type | DeviceNet® | ... | DN | ... | ... | ... | ... | ... | ... |
| | 9-pin D | ... | PA | ... | ... | ... | ... | ... | ... |
| RoHS Compliance | Compliant with RoHS directives | ... | ... | R | ... | ... | ... | ... | ... |
| Full-Scale Flow Range ^{※1} | 10 sccm to 5 slm | ... | ... | ... | 860 | ... | ... | ... | ... |
| | | ... | ... | ... | 8600 | ... | ... | ... | ... |
| | | ... | ... | ... | 865 | ... | ... | ... | ... |
| | | ... | ... | ... | 8650 | ... | ... | ... | ... |
| | 5 to 50 slm | ... | ... | ... | 861 | ... | ... | ... | ... |
| | | ... | ... | ... | 8610 | ... | ... | ... | ... |
| | | ... | ... | ... | 866 | ... | ... | ... | ... |
| | | ... | ... | ... | 8660 | ... | ... | ... | ... |
| | 50 to 400 slm | ... | ... | ... | 862 | ... | ... | ... | ... |
| | | ... | ... | ... | 8620 | ... | ... | ... | ... |
| Connector ^{※2} | Top mounted connector | ... | ... | ... | ... | T | ... | ... | ... |
| | Side mounted pigtail connector | ... | ... | ... | ... | Y | ... | ... | ... |
| Fittings | 1/4" VCR® compatible | ... | ... | ... | ... | ... | 4V | ... | ... |
| | 3/8" VCR® compatible (862x Series only) | ... | ... | ... | ... | ... | 6V | ... | ... |
| | 1.125" c-seal | ... | ... | ... | ... | ... | BA | ... | ... |
| | 1.125" Wseal® | ... | ... | ... | ... | ... | BW | ... | ... |
| | 1.5" c-seal | ... | ... | ... | ... | ... | BM | ... | ... |
| | 1.5" Wseal® | ... | ... | ... | ... | ... | BF | ... | ... |
| Gas | Type of gas | ... | ... | ... | ... | ... | ... | N ₂ | ... |
| Flow | Flow range of gas (sccm or slm) | ... | ... | ... | ... | ... | ... | ... | ... |
| Example | | FM- | PA | R | 8600 | T | 4V | N ₂ | 200 |
| (MFM with 9-pin D connector, RoHS compliant, top-mounted connector, 1/4" VCR® compatible fittings, N ₂ gas, 200 sccm full-scale range) | | | | | | | | | |

※1 Three-digit flow range suffix codes are for DN Series models; Three-digit and four-digit flow range suffix codes are available for PA Series models. Consult factory for details.

※2 Electronic options "T" and "Y" are available only for compact 865 and 866 Series.



Electrical Connections

9-Pin D

| | |
|---|--------------------------------|
| 1 | VALVE OPEN/CLOSE |
| 2 | OUTPUT (0 TO 5 VDC) |
| 3 | POWER +15 VDC |
| 4 | POWER COMMON (VALVE RETURN) |
| 5 | -15 VDC |
| 6 | CONTROL (0 TO 5 VDC) |
| 7 | SIGNAL COMMON |
| 8 | SIGNAL COMMON |
| 9 | VALVE TEST POINT (0 TO +4 VDC) |

DeviceNet[®]


| | |
|---|-------|
| 1 | DRAIN |
| 2 | V+ |
| 3 | V- |
| 4 | CAN_H |
| 5 | CAN_L |

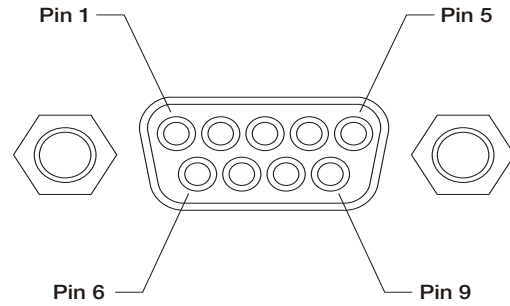

Dimensions


Models with VCR® Compatible Fittings

| | 780x, 781x, 860x, 861x Series | 785x, 786x, 865x, 866x Series | 782x Series |
|---|-------------------------------|-------------------------------|-----------------|
| A | 12.7 mm (0.5") | 12.7 mm (0.5") | 15.0 mm (0.6") |
| B | 83.0 mm (3.3") | 65.0 mm (2.6") | 115 mm (4.5") |
| C | 124.0 mm (4.9") | 106.0 mm (4.2") | 192.3 mm (7.8") |
| D | 18.0 mm (0.7") | 16.3 mm (0.6") | 25.5 mm (1.0") |
| E | 69.0 mm (2.7") | 29.0 mm (1.1") | 90.0 mm (3.5") |
| F | 127.0 mm (5.0") | 127.0 mm (5.0") | 150.0 mm (5.9") |
| G | 132.0 mm (5.2") | 132.0 mm (5.2") | 154.0 mm (6.1") |
| H | 28.6 mm (1.1") | 30.2 mm (1.2") | 38.0 mm (1.5") |
| I | 7.0 mm (0.3") | 16.0 mm (0.6") | 24.4 mm (0.96") |

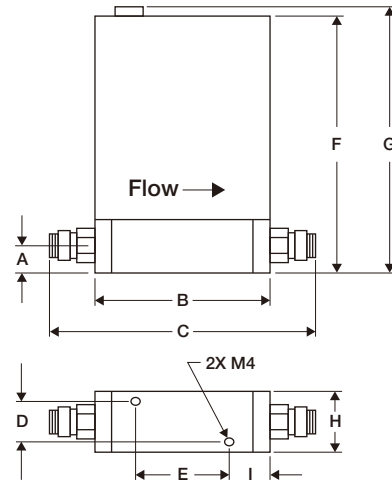

Models with IGS® Compatible Fittings

| | 780x, 781x, 860x, 861x Series | | 785x, 786x, 865x, 866x Series | |
|---|-------------------------------|--------------------|-------------------------------|--------------------|
| | 1.125" IGS® Fittings | 1.5" IGS® Fittings | 1.125" IGS® Fittings | 1.5" IGS® Fittings |
| A | 70.4 mm (2.8") | 70.4 mm (2.8") | 70.4 mm (2.8") | 70.4 mm (2.8") |
| B | 127.0 mm (5.0") | 127.0 mm (5.0") | 127.0 mm (5.0") | 127.0 mm (5.0") |
| C | 25.4 mm (1.0") | 25.4 mm (1.0") | 25.4 mm (1.0") | 25.4 mm (1.0") |
| D | 105.0 mm (4.1") | 105.0 mm (4.1") | 92.8 mm (3.6") | 92.8 mm (3.6") |
| E | 28.6 mm (1.1") | 38.1 mm (1.5") | 28.6 mm (1.1") | 28.6 mm (1.1") |
| F | 21.8 mm (0.9") | 30.0 mm (1.2") | 21.8 mm (0.9") | 30.0 mm (1.2") |
| G | 92.0 mm (3.6") | 92.0 mm (3.6") | 79.8 mm (3.2") | 79.8 mm (3.2") |

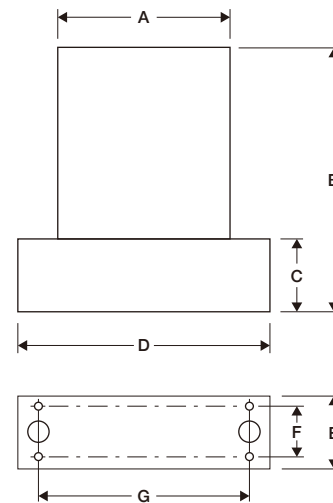

Proterial, Ltd.

<https://www.proterial.com/e>

Headquarters

Piping Components Business Unit
Fine Flow Dept.
Toyosu Prime Square, 5-6-36 Toyosu, Koto-ku, Tokyo 135-0061, Japan
Tel +81-(0)50-3664-9511 Fax +81-294-87-7147

Proterial America, Ltd.

San Jose Office

2570 N. First Street, Suite 200, San Jose, California 95131, U.S.A.
Tel +1-408-467-8900 Fax +1-408-467-8901
E-mail : aerasales@us.proterial.com

Proterial (China), Ltd.

<https://www.china.proterial.com>
Room 1501, T1 of Raffles City, No.1133, Changning Road, Shanghai, 200051, P.R.China
TEL: +86-(0)21-3366-3000

Call Center

TEL: + 86-(0)755-8600-6828 ext: 885
+ 86-(0)138-0989-5542

Email: service@proterial.com

Proterial Europe GmbH

Immermannstrasse 14-16, 40210 Duesseldorf, Germany
Tel +49-211-16009-0 Fax +49-211-16009-29
E-mail : aerasales-europe@eu.proterial.com



Safety Precaution

Before using any of the products introduced in this catalog, please read the respective user manuals thoroughly.

- Contents of this catalog is as of May 2023.
- The products and their specifications are subject to change without notice. Please check the latest catalog, technical documents or specifications before your final design, procurement or use of the products.
- Aera® and Transformer® are registered trademarks of Proterial, Ltd..
- DeviceNet® is a registered trademark of Open Device Net Vendor Association, Inc. (ODVA).
- VCR® is a registered trademark of Swagelok Company Corporation.
- IGS® and Wseal® are registered trademarks of Fujikin Incorporated.

We are not liable for and do not accept responsibility for any loss, direct or indirect, caused by incorrect use, careless handling, force majeure, war, terrorism, fire, pollution, use in unapproved environments, salt damage, or any natural disasters (such as wind or flood damage, earthquakes or lightning), or for any consequential damage.